


Electrical Characteristics

Current-Voltage characteristics of cells
at various irradiance levels

IV - Curve

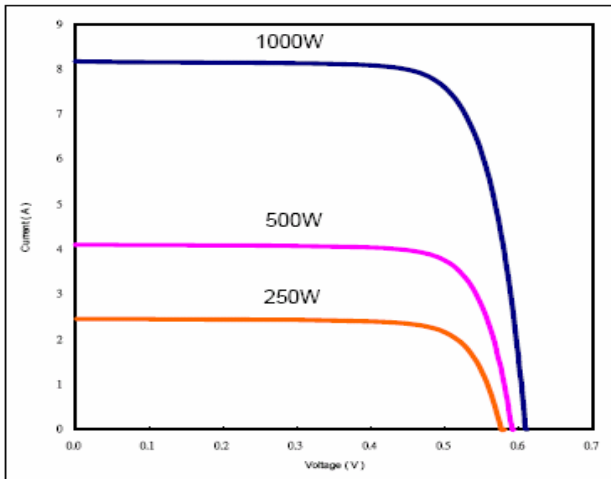

Electric Performance Typical Performance Characteristics		
Short Circuit Current Temperature Coefficient	mA/°C	+4.500
Open Circuit Voltage Temperature Coefficient	V/°C	-0.1500
Maximum Power Temperature Coefficient	%/°C	-0.4982
Performance Warranty		
90%output, 12Years		
80%output, 25 Years		

Quality Assurance


1. Electrical insulation test.
2. Outdoor exposure test.
3. Hot-spot endurance test.
4. UV-exposure.
5. Thermal cycling test.
6. Humidity freeze test.
7. Damp heat test.
8. Robustness of terminations test.
9. Wet leakage current test.
10. Mechanical load test.
11. Hail impact test.
12. Bypass diode thermal test.

Physical Specifications

Dimension :

Length :
1646mm/64.80in
Width :
995mm/39.17in
Depth :
50mm/1.97in
Weight :
20.0 kg/pcs
10pcs/1 carton

Loading Capacity
240pcs/20ft Container
560pcs/40ft Container

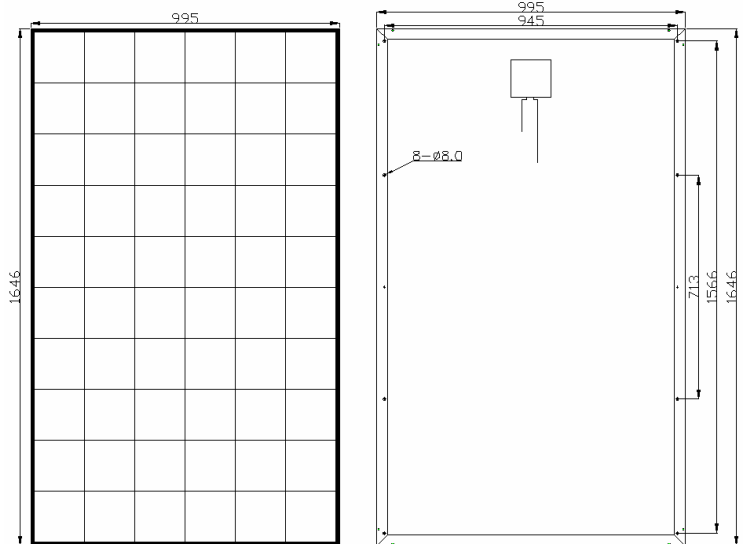

Tynsolar Corporation

Chunan Fab: 1381 Ren-ai Rd.,
Jhunan Township, Miaoli County 350, Taiwan R.O.C.

Http://www.tynsolar.com.tw

Tel : 886-37-580006

Fax: 886-37-586339